

SPLIT FACE SPAR

ARCHITECTURAL MASONRY

Split Face Spar provides a craggy, rugged, rock face look which changes with the varying levels of light and shade. Very impressive in large areas.



SPLIT FACE SPAR

ARCHITECTURAL MASONRY




An eye-catching fleck effect gives the surface of the block a certain amount of sparkle. This is referred to as the Split Face 'Spar' range. Split Face or Split Face Spar; specifiers will be delighted with the very individual natural light enhanced texture.

PROPERTIES AND PERFORMANCE


Mean Compressive Strength

 Solid 17.5 N/mm².


Dry Density

 2100 Kg/m³.


Thermal Value (at 3% moisture)

 Solid k = 1.128W/m°C


Moisture Movement

 Not greater than 0.30mm/m

Sound Insulation



 Average reduction 43 - 50dB.

Fire Resistance

 Split Face Spar is manufactured from Class 1 Fire Resistant Aggregate as defined in BS 5628 Part 3 and complies with BS EN 1996-1-2005.



METRIC SIZES AND TYPES

Work Size 440mm x width x 215mm
Co-ordinating Size 450mm x width x 225mm

Type  95mm 146mm
Solid 

METRIC MODULAR SIZES AND TYPES

Work Size 390mm x width x 190mm
Co-ordinating Size 400mm x width x 200mm

Type  95mm
Solid 



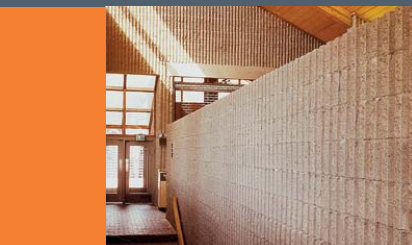
COTSWOLD YELLOW (Black Fleck)



SLATE GREY (White Fleck)



SLATE GREY (Black Fleck)



SPLIT RIB

Split Rib is a vertical ribbed feature block which enables you to create a distinctive visual stack bond effect. Available in a Split Face, Split Face Spar or Split Face Strata finish, it is spectacularly effective when used in panels or column encasements.



RUSTIC RED (Black Fleck)



NATURAL WHITE (White Fleck)



NATURAL WHITE (Black Fleck)



TECHNICAL HELPLINES: 01977 673221