


IMPORTANT READING FOR PAVING CONTRACTORS and DOMESTIC CUSTOMERS

Plaspave
LANDSCAPING PRODUCTS

MEMBERS OF
Interpave
THE PRECAST CONCRETE PAVING
AND KERB ASSOCIATION

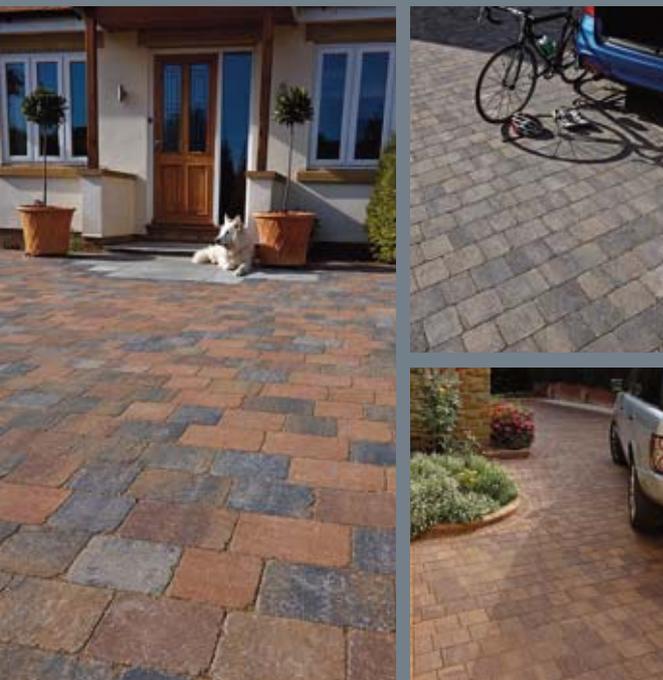

FITNESS FOR PURPOSE

All products featured in this brochure are intended for residential /domestic use either as footpaths, patios or driveway/parking areas for cars and light vans. The manufacturer cannot be responsible for the loss of driveway integrity or paver damage resulting from overrun by trade vehicles, large vans, trucks, skips and similar heavy traffic. All Plaspave Concrete Block Paving products are manufactured by companies in the Plasmor Group under Quality Assurance BS EN ISO 9001:2000. Plasmor expects the paving contractors and householder to inspect packs of product prior to laying and in the unlikely event that any pack of product reaches you in an unsatisfactory condition, the Merchant Retailer should be notified immediately.

It is important to identify any defect that is visually apparent prior to laying as the manufacturer cannot be responsible for costs of uplifting and relaying.

All products supplied by Plasmor Limited are subject to standard Plasmor Conditions of Sale which outline the extent of our Manufacturer's liability.

CHOOSING A COLOUR

The colours in this brochure are as accurate as reprographic and four colour printing processes allow. **WHEN FINALLY DECIDING ON COLOURS, IT IS RECOMMENDED THAT CUSTOMERS SEE SAMPLES.** One of the positive benefits of Plaspave is that colours will appear to change very slightly in different levels of light. You will notice a difference between bright sunlight, summer and winter light, wet and dry. It should also be noted that while every effort is made to ensure the consistency of product colour and texture across batches and between factories some slight variation is possible. Please ensure you order all the packs you require so that they can be supplied from the same batch. Paving contractors should follow best laying practice - mixing product on the site from a minimum of three packs.

LAYING ADVICE

Please ensure you order all the packs you require so that they can be supplied from the same batch. Paving contractors should follow best laying practice - mixing product on the site from a minimum of three packs. Products such as Sorrento, Amalfi and Ginestro are rumbled during manufacturing and this process may leave a dusty residue on the surface of some pavers. This will weather in and be removed over time by rainfall - alternatively it could be removed more quickly by the application of a patio cleaner. This unavoidable residue, although it may be considered unsightly, will in no way affect the performance of the paving. Despite being randomly packaged in the pack, it may not be immediately obvious that Sorrento, Amalfi and Ginestro have a top and bottom - it is important to lay all blocks top upwards! The top face has deeper colours and superior texture. The spacer nibs are designed to work correctly only when all product is laid "top upwards". Please take a moment to familiarise yourself with the product and observe the positioning of the vertical spacer nibs.

ERRORS, OMISSIONS AND CHANGES

Every effort has been made to ensure the accuracy of the information provided in this brochure but it is published errors and omissions excepted. No part of the brochure constitutes part of an actual or implied contract. Plasmor's Standard Terms and Conditions apply. Colours, textures, dimensions, weights are subject to manufacturing tolerances and the specification and availability of product ranges and colours may be subject to change without prior notice.



Plaspave's **10 YEAR PRODUCT GUARANTEE** is your **PEACE OF MIND** - full details available on request or visit www.plaspave.co.uk for further information

For further information contact one of the Plasmor Limited regional telephone numbers:

EASTERN ENGLAND:

01977 673221

WESTERN ENGLAND:

0151 423 1161

or visit our website where you'll find our Galleria of inspirational homes and gardens, design hints and tips, block laying patterns, diy information and contractor or stockist details:

TRADE VISITOR

www.plasmor.co.uk

HOMEOWNER:

www.plaspave.co.uk

SORRENTO, AMALFI & GINESTRO TO IDENTIFY THE TOP
With a right hand grip, the forward facing right hand side of the block should have the spacer-nib 25mm from the front edge. If the spacer nib is 50mm from the front edge then the block is upside down. It will soon become obvious that the visual



appeal of the project is improved when all blocks are correctly laid top upwards.

PALERMO - When laying Palermo you need to protect the wacker plate with a rubber or neoprene mat to protect the riven surface of the paving. A generous covering of jointing sand will also help to protect the surface.

EFFLORESCENCE and DIFFERENTIAL DRYING

Plaspave product ingredient mixes combined with modern, sophisticated curing technology contribute to reduce the incidence of EFFLORESCENCE. However, all concrete products have a tendency to be subject to efflorescence staining in their early life. This is a naturally occurring phenomenon which should not be regarded as cause for concern. Efflorescence is not detrimental to the performance of the pavers and is usually a temporary condition which tends to disappear with weathering over a period of time.

On occasions, darker patches may be visible on the surface of the paving blocks. This is due to DIFFERENTIAL DRYING and it will disappear over time as the blocks dry out. Differential drying occurs as a result of the paving blocks being cured at slightly different rates; they may subsequently dry out at different rates. This is no way detrimental to the strength, durability or performance of the product. Plasmor cannot be responsible for this temporary effect.