

SPLIT FACE STRATA ARCHITECTURAL MASONRY

Plasmor Architectural Masonry is a proven product in its fourth generation of development. This latest range, Split Face Strata moves Masonry into the fifth generation.



SPLIT FACE STRATA


ARCHITECTURAL MASONRY



The eye catching range of natural colours with fleck effect on the exposed face adds further visual potential with added opportunity and design flexibility to create stunning projects.


METRIC SIZES AND TYPES

Work Size 440mm x width x 215mm
Co-ordinating Size 450mm x width x 225mm



METRIC MODULAR SIZES AND TYPES

Work Size 390mm x width x 190mm
Co-ordinating Size 400mm x width x 200mm




PROPERTIES AND PERFORMANCE


Mean Compressive Strength

 17.5 N/mm².


Dry Density

 2100 Kg/m³.


Thermal Value (at 3% moisture)

 k = 1.127 W/m°C


Moisture Movement

 Not greater than 0.30mm/m

Sound Insulation

 Average reduction 43 - 50dB.

Fire Resistance

 Split Face Strata is manufactured from Class 1 Fire Resistant Aggregate as defined in BS 5628 Part 3 and complies with BS EN 1996-2005.




YELLOW



BARLEY



RED

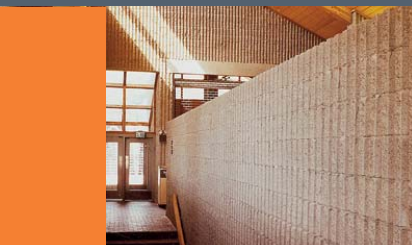


SPLIT RIB

Split Rib is a vertical ribbed feature block which enables you to create a distinctive visual stack bond effect. Available in a Split Face, Split Face Spar or Split Face Strata finish, it is spectacularly effective when used in panels or column encasements.



BUFF

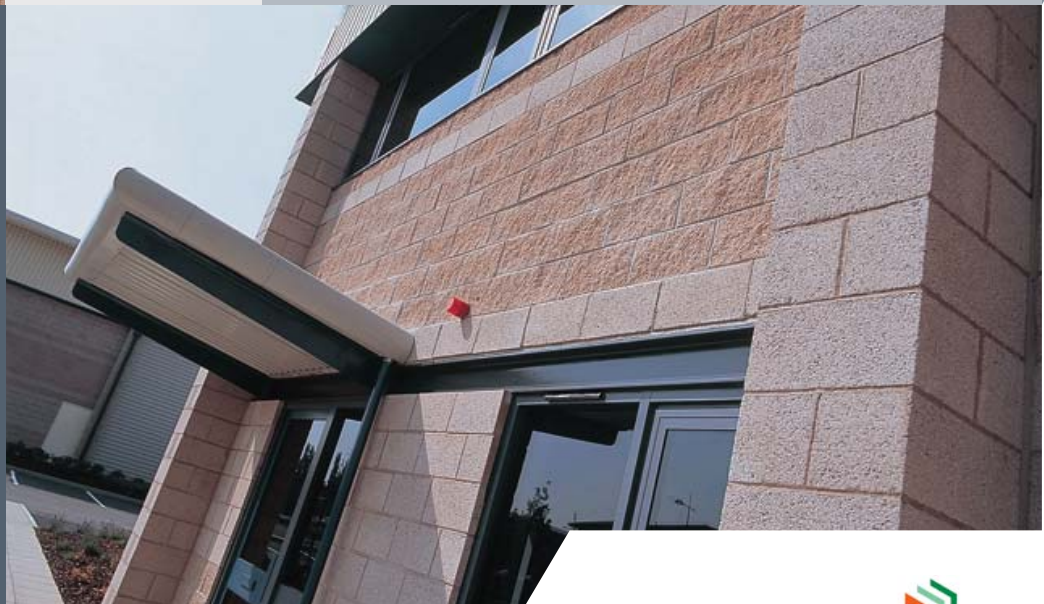

TECHNICAL HELPLINES: 01977 673221